

型号	Model	LS-2181
电压	Voltage	220V 50~60Hz Single 单相
功率	Power	3 KW
气压	Air Pressure	0.5-0.8 MPa
外形尺寸	Dimensions	2620*1470*1800 MM
装箱尺寸	Packing size	2135*1855*1560 MM
净重	Net weight	500 KG
毛重	Gross weight	680 KG

\*以上型号仅供参考，详细情况请咨询。  
The above models are for reference only, please inquire for details.

\*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。  
For improvement, product specifications are subject to change without notice. For safety reasons, read the manual carefully before use.

# LS-2181

点胶机  
Dispenser machine



浙江凌志智能科技有限公司  
ZHEJIANG LENS H INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719  
Address: No 500 RD Guangwen District Haishu Ningbo Zhejiang, China E-mail: wuhanqiao66@163.com web: www.lensh.net



LENSH®

## 应用范围 | Application

适用女士内衣 运动类高弹服饰点胶工艺

Suitable for women's underwear sports high-bounce clothing adhesive process.




## 应用工艺 | Application process

应对需求, 突破常规设计

Response to demand, set two-way function, can be switched at will

标配双工位 (双视觉 双背光 双吸风)

Double-seat dual-vision dual-backlight double suction is standard.

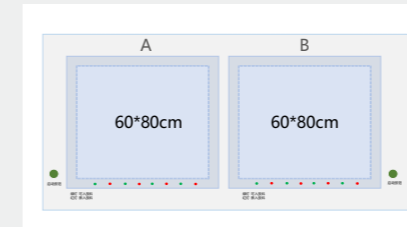

防撞保护 灯光预警提示 安全保障  
Anti-collision protection Light warning alert safety and security.

远程数据采集系统 (选配)

Remote data collection system (optional)



故障率数据 Failure rate data  
产能数据 Capacity data  
使用率数据 Usage data

## 规格范围 | Specification range

视觉识别处理 Visual recognition processing

1、支持360°任意摆放  
Support 360° arbitrary placement



2、支持同形状 多裁片摆放  
Support multi-part placement of the same shape




3 支持寻边+CAD 图叠加  
Support edge hunting + CAD drawing overlay



## 效率分析 | Efficiency analysis


~ 180% ↑

传统单工位点胶机  
Traditional single-seat adhesive machine.

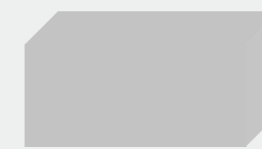

无视觉 精度无法控制 辅料等待 效率低  
No visual precision can not control the spread waiting low efficiency.

双视觉双工位点胶机  
Dual vision duplex dosing machine.

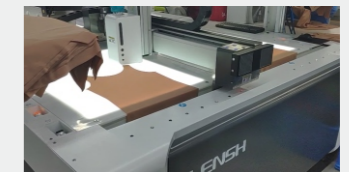

视觉识别处理, 精度高 效率高 品质高  
Visual recognition processing High precision, high efficiency and high quality